

CATALOGUE

Audio/Video Door Phone Systems
Home Automation Systems



VOP Catalogue V1.0 2010.3.19



XIAMEN LEELEN TECHNOLOGY CO., LTD.

65 Sunban South Road, Jimei, Xiamen, 361021 China

TEL. No. 0086 592 6299656, 6299666

FAX. No. 0086 592 6299688

[Http://www.leelen.com](http://www.leelen.com)

E-mail: export@leelen.com

XIAMEN LEELEN TECHNOLOGY CO., LTD.



Leelen Building



Xiamen Leelen Technology Co., Ltd. was founded in 1982. Since then Leelen established more modern factories for video door phones, CCTV cameras, electric products, models, plastic, and Siemens SMT production line in the building with 21,800 square meters. Leelen is growing up so quickly that she bought another site which occupies 86,000 square meters in 2007.


Being a China Top 10 Brand, Leelen is in the top 3 group indeed and occupies about 20% market share of videodoor phones. She has received various awards/certificates such as 1st Brand of Quality Satisfying Users, 1st Recommended Products For Peace City, Excellent Management Customer (IQNet), ISO9001:2000, ISO14001, CE, FCC, RoHS, CCC, AAA Grade, etc. Furthermore Leelen is the vice-president of the China Security Production Council, the member of China Standardized Technology Council of Security And Alarm System, and the drafter of China Standards of Security Project Technology Regulation and Technology Requirements of Security System Applied In Residential Districts, etc.

Because of the great reputation Leelen is favored by many prestigious partners who are ABB, Honeywell, Audio, etc. These cooperation meanwhile help Leelen grow up. Now Leelen has 37 service offices through China and more than 1,200 employees. There are about 170 R&D engineers and 50 QA engineers.

Leelen takes "Technology for life" as her faith and does all to provide the best solutions for people.

JB-304



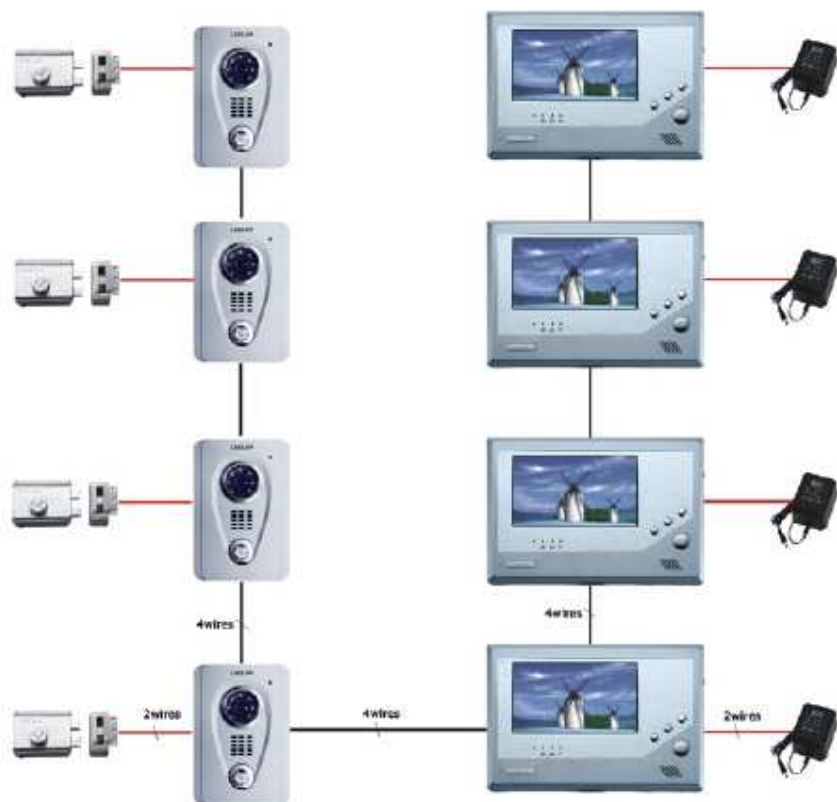

Features

- DIY system with PLUG & PLAY connection.
- Up to 4 door stations and 4 indoor phones.
- Intercom between indoor phones.
- Calling transfer between indoor phones.
- E-lock can be connected to both door station and indoor phone.
- Anti-vandal, waterproof, cast aluminium, surface mount.
- Night viewing with IR LED.
- Handsfree indoor phones is optional.
- Pin-hole door camera is optional.

Door stations

Technical parameters:

Camera:	1/3" CCD (color), CMOS (b/w)
Min. illumination:	0.01LUX
Video Output:	1V _{pp} /75Ω
Working voltage:	DC18V±10%
Working Current:	≤500mA
Environment Temperature:	-40 ~ 70 °C



Indoor phones

Technical parameters:

Display:	4" CRT/ 3.5", 4", 5", 5.8" & 7" TFT-LCD
Resolution:	480X234 (3.5")/960X234 (4", 5", 5.8")/1440X234 (7") pixels
Working voltage:	DC18V±10%
Working Current:	≤500mA
Environment Temperature:	-10 ~ 55 °C



JB-304 VILLA INTERCOM SYSTEM



V-22

V-23

Power supply

Technical parameters:

Voltage Input:	AC100V~240V
Voltage Output:	DC18V
Current Output:	1A
Power plug style:	Optional



Packing list(KIT)

Video door station:	1 piece
Video indoor phone:	1 piece
Power supply (adapter):	1 piece
Door station bracket (V1):	1 piece
Indoor phone bracket:	1 piece
4 wires cable (10meter):	1 piece
Terminal connector:	some
Video resistance:	some
Screw driver:	1 piece
Expansion plug:	some
Screw:	some
User's manual:	1 piece



MODELS WITH DECORATIVE ABS & ALUMINIUM COAT



Model V-16 (ABS)



Model V-16 (aluminium)



Model V-17 (ABS)



Model V-17 (aluminium)



Model V-22 (ABS)



Model V-22 (aluminium)



Model V-23 (ABS)



Model V-23 (aluminium)