

Era One

The new Era One line of transmitters:
the ideal and sleek design solution
to control multi-user systems.



Nice

Home Automation

Nice

Era One

The system includes **1, 2, 4 and 9 channel transmitters and prewired receivers with connector, with and without built-in transmitter.**



433.92 MHz rolling code, with management of Identity Codes and Certificates, self-learning and built-in proximity receiver; with 72 bit O-Code encoding, also compatible with receivers with Nice FLOR encoding.

Available in versions with multiple input sequential encoding (Era OneC).

Evolved: uses data processing and recognition systems that increase its degree of security and deliver a threefold reduction in automation response times.

Easy memorisation, even at a distance, thanks to Opera receivers.

There are two options for enabling a new Inti transmitter, **even at a distance from the system:**



- using a transmitter already programmed in the receiver, thanks to the enabling **Code exchange** between the two (figure 1);
- using the Nice O-Box connection interface; the receiver's **Certificate** is entered by just placing the new Era One next to the O-Box and following the guided procedure on a PC or PDA (figure 2).

Safe, if a transmitter is stolen or lost, with the O-Box the user can:

- **replace it**, maintaining the same functions as in the previous one;
- **disable** the old transmitter by increasing the priority level on the new Era One.

Extremely practical: using the O-Box software, the Era OneC version allows whole packs of 10 devices to be programmed in a single procedure, without even opening them!


Elegant and convenient: the Era One transmitter can be used as a stylish, high-tech keyring or fixed to the wall or your car's dashboard with the handy support included in the pack.

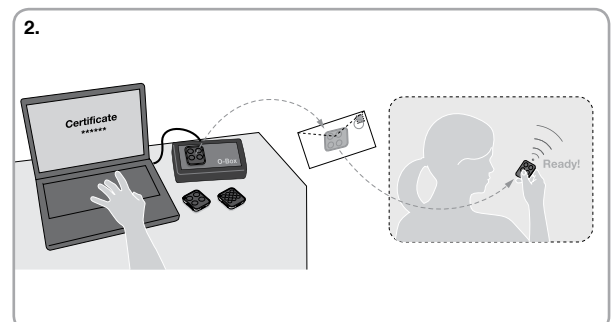

More secure transmissions!

Era OneFM, ideal for use in cities or places where many devices are present.

868.46 MHz Rolling Code transmitter line, using frequency modulation (FM), less sensitive to interference than amplitude modulation AM.

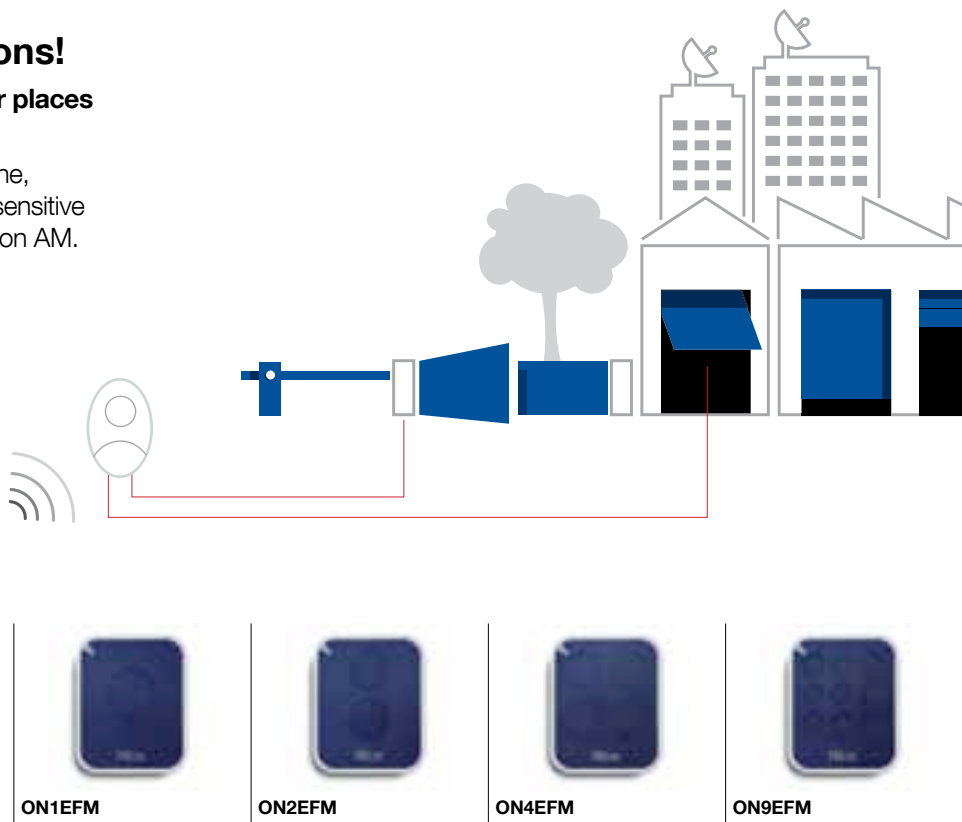

The complete line of receivers with Opera system functions, suitable for all installation requirements:

- **with connector**, compatible with latest-generation Nice control units with SM port;
- **universal prewired**, for use with all types of control unit, **for the control of any automation, lighting or irrigation system or other electric circuits.**

Maximum flexibility:

up to 1024 transmitters can be memorised.

Convenient and practical:

the inclusion of a transmitter in the OXIT/OXITFM, OX2T/OX2TFM and OX4T receivers allows radio codes to be accessed by means of the O-Box multifunction interface even when in inaccessible positions (figure 3). OXIT/OXITFM, OX2T/OX2TFM and OX4T receivers can be used as signal repeaters to increase the operating distance between transmitters and other One series receivers (figure 4).

Secure use, thanks to the 3 password-protected levels.

The O-Box and dedicated software applications for PC and PDA allow:

- **quick, user-friendly programming** of receivers and transmitters;
- **management and printout of code list;**
- creation of **individual installation databases** (useful in multi-user systems).

433,92 MHz receivers



OXI, OXIT



OX2, OX2T



OX4T

868,46 MHz receivers





OXIFM, OXITFM



OX2FM, OX2TFM



O-BOX



Era One 433.92 MHz transmitters

Code	Description	Pcs/pack
ON1E	1 channel, 433.92 MHz	10
ON2E	2 channels, 433.92 MHz	10
ON4E	4 channels, 433.92 MHz	10
ON9E	9 channels, 433.92 MHz	10
ON1CE	1 channel, 433.92 MHz, with multiple input sequential encoding	10
ON2CE	2 channels, 433.92 MHz, with multiple input sequential encoding	10
ON4CE	4 channels, 433.92 MHz, with multiple input sequential encoding	10

433.92 MHz receivers**With connector**

Code	Description	Pcs/pack
OXI	4 channels, without built-in transmitter	1
OXIT	4 channels, with built-in transmitter	1

Pre-wired universal

Code	Description	Pcs/pack
OX2	2 channels, without built-in transmitter	1
OX2T	2 channels, with built-in transmitter	1
OX4T	4 channels, with built-in transmitter	1

Era One 868.46 MHz transmitters

Code	Description	Pcs/pack
ON1EFM	1 channel, 868.46 MHz	10
ON2EFM	2 channels, 868.46 MHz	10
ON4EFM	4 channels, 868.46 MHz	10
ON9EFM	9 channels, 868.46 MHz	10

868.46 Hz receivers**With connector**

Code	Description	Pcs/pack
OXIFM	4 channels, without built-in transmitter	1
OXITFM	4 channels, with built-in transmitter	1

Pre-wired

Code	Description	Pcs/pack
OX2FM	2 channels, without built-in transmitter	1
OX2TFM	2 channels, with built-in transmitter	1

Connection interface

Code	Description	Pcs/pack
OBOX2	Dual Band Interface, for 433.92/868.46 MHz devices, complete with software, supplied with USB connection cable.	1
OBOX2B	Dual Band Interface, for 433.92/868.46 MHz devices, complete with software, with USB connection cable and built-in Bluetooth module.	1

Transmitter technical specifications

	Carrier frequency	Estimated range	Encoding	Power supply	Battery life	Protection class	Dimensions Weight
ON_E, ON_CE	433.92 MHz	200 m (outdoor); 35 m (if inside buildings)*	O-Code 72 bit; rolling code	3 Vdc; type CR2032 lithium battery	2 years (with 10 transmissions per day)	IP40 (use in protected environments)	44x55x10 h mm 11 g
ON_EFM	868.46 MHz						

* Transmitter range and receiver reception capacity may be affected by any devices operating on the same frequency in the area.

Receiver technical specifications

	Reception frequency	Transmission frequency	Input impedance	Sensitivity	Encoding	Number of channels	Relay contact	Power supply	Absorption	Protection class	Dimensions Weight	
OXI	433.92 MHz	-	52 Ohm	>0.5 μ V for signals with successful outcomes	O-Code, FloR, Flo	4 (15 on BUS T4)	-	5 Vdc	30 mA (max)	IP 30	50x19x45 h mm, 20 g	
OXIT		433.92 MHz				2	max 0.5 A 50 V (NA)	from 12 to 28 Vdc/Vac	80 mA (max) with relays active			
OX2		-								433.92 MHz	4 relays with NO and NC contacts, voltage-free	5 A - 250 V
OX2T		433.92 MHz										
OX4T	868.46 MHz	-	52 Ohm	>0.8 μ V for signals with successful outcomes	O-Code	4 (15 on BUS T4)	-	5 Vdc	30 mA (max)	IP 30	50x19x45 h mm, 20 g	
OXIFM		868.46 MHz				2	max 0.5 A 50 V (NA)	from 12 to 28 Vdc/Vac	100 mA (max) with relays active			
OXITFM		-								433.92 MHz	4 relays with NO and NC contacts, voltage-free	5 A - 250 V
OX2FM		868.46 MHz										
OX2TFM	868.46 MHz											



Nice SpA
Oderzo TV Italia
info@niceforyou.com

www.niceforyou.com



Nice cares for the environment.
Using natural paper it avoids excessive
use of raw materials and forest exploitation.
Waste is reduced, energy is saved
and climate quality is improved.

The data indicated in this brochure
is purely illustrative. Nice reserve the right to
make any necessary changes to the products.